

Nice

Kit offer to automate garage doors and gates



Nice

Home Automation



For swing gates with leaves up to 2 m, surface mounted.

Electromechanical gear motor 24 Vdc.

Gear motor characteristics:

- **reliable and silent:** thanks to the patented layout of the internal components and less moving parts
- **easy to install:** after the gear motor has been assembled, all electrical connections are made from above
- **user-friendly release** with personalised Nice key or standard lock (optional)
- pre-assembled, **travel stops** PLA13 in opening

New control unit MC424:

- easy programming by pressing a single button
- clutch with anti-crush safety feature
- automatic memorization of limit switches in opening and closing with self-learning function
- pause time programming; partial opening; slowdown during opening and closing

Sophisticated electronics: slowdown, obstacle detection system, can be linked to the 8,2 KOhm resistive sensitive edge.

No blackout: continues to work even during power failures using optional (PS124) batteries that fit inside the control unit.

The kit contains:

WG2024

2 surface-mounted electromechanical gear motors, with Nice key release



FLO2R-S

2 transmitters
433.92 MHz,
2 channels



MC424

1 control unit with plug-in receiver SMXI



PLA13


travel stops for opening

Code	Description	Pc./pallet
WINGO2024KCE	Kit for swing gates with leaves up to 2 m, surface mounted.	12


N.B. The content of the package may vary: consult the retailer

Technical specifications		WG2024
Electrical specifications		
Power	(Vdc)	24
Current absorbed (line)	(A)	3,5
Power absorbed	(W)	85
Incorporated capacitor	(µF)	-
Performance		
Speed	(m/s)	0,018
Torque	(N)	1500
Work cycle	(cycles/hour)	30
Dimensions		
Working temp.	(C°)	-20 ÷ +50
Protection level	(IP)	44
Dimensions	(mm)	98x95x770
Weight	(kg)	17

Utilisation limits:

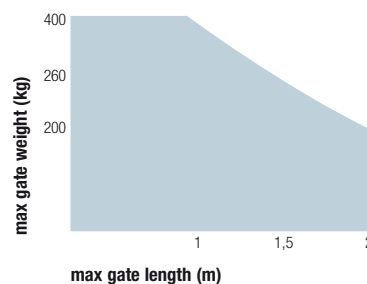

For updated and complete information, consult the product technical manual.

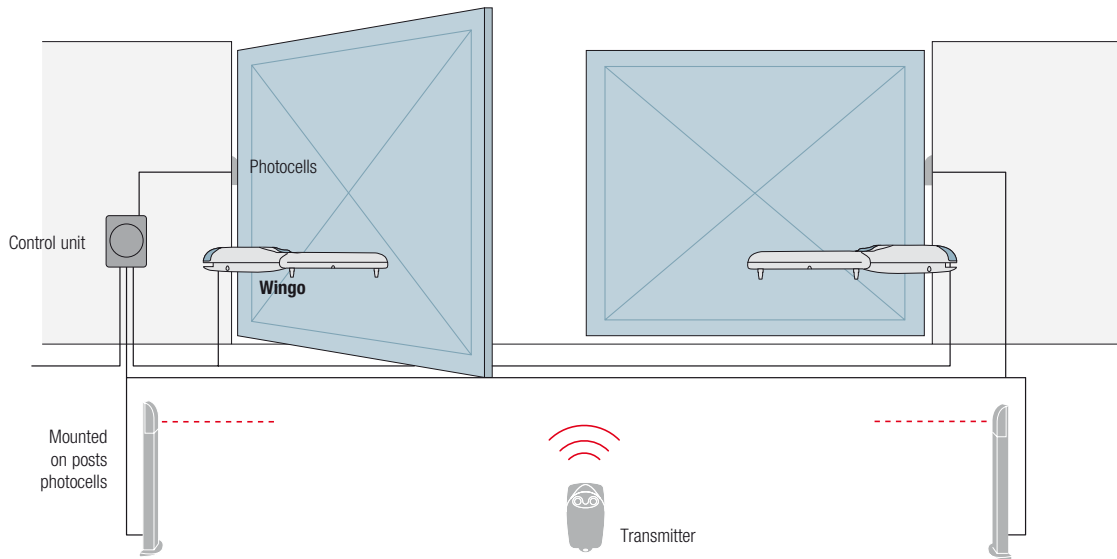

Accessories



PLA10
vertical 12 V electric lock
(required for gates longer
than 3 m)

Pc/Pack. 1



PLA11
horizontal 12 V electric lock
(required for gates longer
than 3 m)

Pc/Pack. 1



PLA13
travel stops for closing
and opening manoeuvres

Pc/Pack. 4



PLA14
screw-adjustable
rear bracket

Pc/Pack. 2



PLA15
screw-adjustable
front bracket

Pc/Pack. 2




CM-B
lock with two metal keys
compatible with SELE



PS124
24V battery with
built-in battery charger

Pc/Pack. 1





Nice SpA
Oderzo TV Italia
Ph. +39.0422.85.38.38
Fax +39.0422.85.35.85
info@niceforyou.com

www.niceforyou.com

The information shown in this publication is purely indicative. Nice reserves the right to make any modifications to the products as it sees fit.